


FB090F/092F 标准公制翻边轴承
Metric Standard Flange Bushing

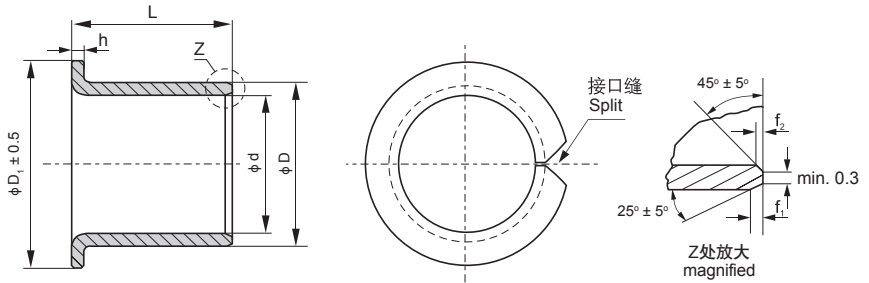

※标准翻边套标注方式：Standard Flange Bushing Label Mode FB□F 25150

单位unit:mm

型号 Type	内径 φ d	外径 φ D	法兰外径 φ D ₁ ± 0.5	法兰壁厚 h ⁰ _{-0.20}	高度 L ± 0.25	f ₁	f ₂	相配轴径 Axle	相配座孔 Housing
FB090 □F 2520	25	28	35	1.5	20	0.8	0.4	25 ^{-0.020} _{-0.041}	28 ^{+0.021} ₀
FB090 □F 2525					25				
FB090 □F 3020	30	34	45	2.0	20	1.2	0.6	30 ^{-0.020} _{-0.041}	34 ^{+0.025} ₀
FB090 □F 3025					25				
FB090 □F 3030					30				
FB090 □F 3530	35	39	50		30			35 ^{-0.025} _{-0.050}	39 ^{+0.025} ₀
FB090 □F 3540					40				
FB090 □F 3550					50				
FB090 □F 4030	40	44	55		30	1.6	0.8	40 ^{-0.025} _{-0.050}	44 ^{+0.025} ₀
FB090 □F 4040					40				
FB090 □F 4050					50				
FB090 □F 5030	50	55	65	30	50 ^{-0.025} _{-0.050}			55 ^{+0.030} ₀	
FB090 □F 5040				40					
FB090 □F 5050				50					
FB090 □F 5530	55	60	70	30	1.6	0.8	55 ^{-0.030} _{-0.060}	60 ^{+0.030} ₀	
FB090 □F 5540				40					
FB090 □F 5550				50					
FB090 □F 6040	60	65	75	40			60 ^{-0.030} _{-0.060}	65 ^{+0.030} ₀	
FB090 □F 6050				50					
FB090 □F 6060				60					
FB090 □F 8050	80	85	100	50	1.6	0.8	80 ^{-0.030} _{-0.060}	85 ^{+0.035} ₀	
FB090 □F 8060				60					
FB090 □F 8080				80					
FB090 □F 10050	100	105	120	50			100 ^{-0.036} _{-0.071}	105 ^{+0.035} ₀	
FB090 □F 10060				60					
FB090 □F 10080				80					
FB090 □F 16060	160	165	190	60	1.6	0.8	160 ^{-0.043} _{-0.083}	165 ^{+0.040} ₀	
FB090 □F 16080				80					
FB090 □F 20060	200	205	235	60			200 ^{-0.050} _{-0.096}	205 ^{+0.046} ₀	
FB090 □F 20080				80					