


SF-1/1W/1B/1D/1T/1P/1S/1SS 标准公制翻边轴套

Metric Standard Flange Bushing

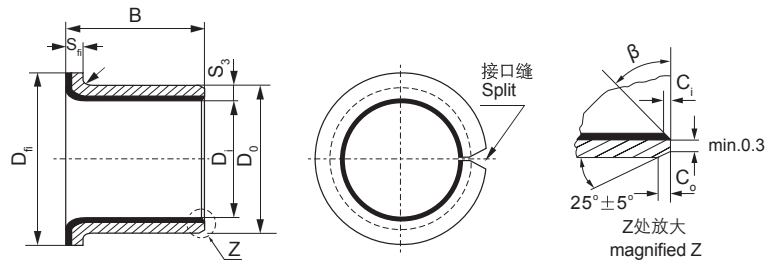

S ₃	1.0	1.5	2.0	2.5
r	1 ^{-0.5}	1 ± 0.5	1.5 ± 0.5	2 ± 0.5

※标准翻边套标注方式: Standard Flange Bushing Label Mode SF-1□F 06040

单位unit:mm

型号规格 Designation	轴径 D _s	座孔(H7) D _H	外径公差 D _O	压装后 内孔公差 D _{I,a}	配合间隙 C _O	壁厚 S ₃	尺寸				
							D _I	D _O	D _{fl} ±0.5	B±0.25	S _{fl} -0.2
SF-1□F 06040	6 -0.013 -0.028	8 +0.015	8 +0.055 +0.025	6.055 5.990	0.077 0.000	1.005 0.980	6	8	12	4	1
SF-1□F 06070										7	
SF-1□F 08055	8 -0.013 -0.028	10 +0.015	10 +0.055 +0.025	8.055 7.990	0.083 0.003		8	10	15	5.5	
SF-1□F 08075										7.5	
SF-1□F 10070	10 -0.016 -0.034	12 +0.018	12 +0.055 +0.025	10.058 9.990	0.086 0.003		10	12	18	7	
SF-1□F 10090										9	
SF-1□F 10120										12	
SF-1□F 12070	12 -0.016 -0.034	14 +0.018	14 +0.065 +0.030	12.058 11.990	0.092 0.006		12	14	20	7	
SF-1□F 12090										9	
SF-1□F 12120										12	
SF-1□F 14120	14 -0.016 -0.043	16 +0.018	16 +0.065 +0.030	14.058 13.990	0.092 0.006		14	16	22	12	
SF-1□F 14170										17	
SF-1□F 15090	15 -0.016 -0.034	17 +0.018	17 +0.065 +0.030	15.058 14.990	0.092 0.006		15	17	23	9	
SF-1□F 15120										12	
SF-1□F 15170										17	
SF-1□F 16120	16 -0.016 -0.034	18 +0.018	18 +0.065 +0.030	16.058 15.990	0.092 0.006		16	18	24	12	
SF-1□F 16170										17	
SF-1□F 18120	18 -0.016 -0.034	20 +0.021	20 +0.075 +0.035	18.061 17.990	0.095 0.006		18	20	26	12	
SF-1□F 18170										17	
SF-1□F 18200										20	
SF-1□F 20115	20 -0.020 -0.041	23 +0.021	23 +0.075 +0.035	20.071 19.990	0.112 0.010		1.505 1.475	20	23	30	
SF-1□F 20165						16.5					
SF-1□F 20215						21.5					
SF-1□F 22150	22 -0.020 -0.041	25 +0.021	25 +0.075 +0.035	22.071 21.990		22		25	32	15	
SF-1□F 22200										20	
SF-1□F 25115	25 -0.020 -0.041	28 +0.021	28 +0.075 +0.035	25.071 24.990		25		28	35	11.5	
SF-1□F 25165										16.5	
SF-1□F 25215					21.5						
SF-1□F 30160	30 -0.025 -0.050	34 +0.025	34 +0.075 +0.035	30.285 29.990	0.126 0.010	2.005 1.970	30	34	42	16	
SF-1□F 30260										26	
SF-1□F 35160	35 -0.025 -0.050	39 +0.025	39 +0.085 +0.045	35.085 34.990			35	39	47	16	
SF-1□F 35260										26	
SF-1□F 40260	40 -0.025 -0.050	44 +0.025	44 +0.085 +0.045	40.085 39.990			40	44	53	26	
SF-1□F 40400										40	